



WOS CD SERIES

CONDENSATE DISTRIBUTOR

3/4" to 3"

inlet connection

1,5 to 65 °C

operating temperature range

RAL 5012

standard colour

DESCRIPTION

WOS CD is intended for systems, where amount of generated condensate exceeds capacity of single largest available WOS water oil separator. WOS CD can evenly distribute collected condensate between up to three WOS 35 water oil separators.



WOS CD is equipped with flow distributor on the inlet port, up to 8 hose tail connections mounted on elbows for convenient outlet, manual ball valve for cleaning purpose and vent port for safe aeration.

Optional wall mounting kit is available. Maximum capacity in regard to free air delivery, when connected to WOS-35 is 120 Nm³/min.

APPLICATIONS

- Automotive
- Electronics
- Food and beverage
- Chemical
- Petrochemical
- Plastics
- Paint
- General industrial application



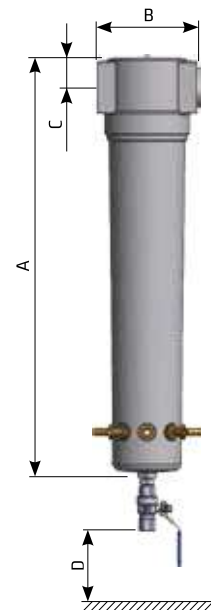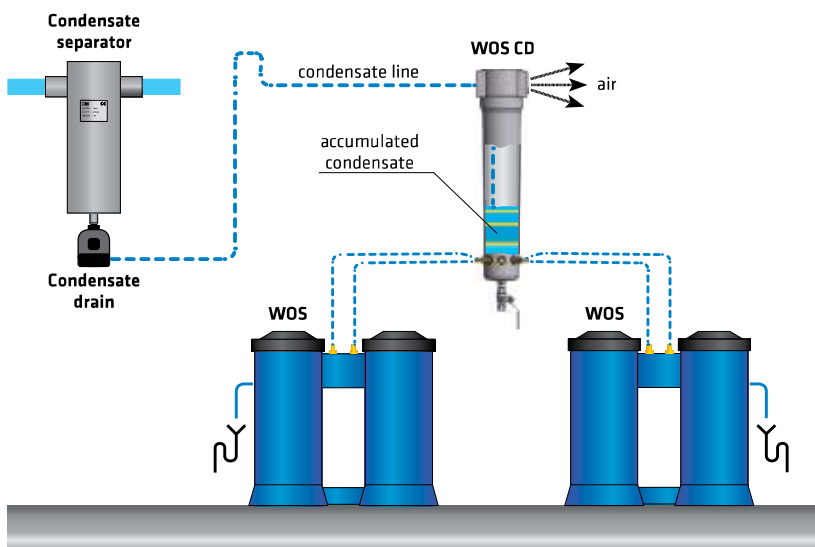

TECHNICAL DATA

Type	Pipe size	Hosetail connections	Dimensions [mm]				Volume	Mass
	inch		A	B	C	D	L	kg
WOS CD 2	3/4"	2	257	88	20	140	0,6	1,2
WOS CD 4	1 1/2"	4	461	125	32	140	2,8	3
WOS CD 8	2"	8	684	163	43	140	6,0	6
WOS CD 12	3"	12	795	240	59	140	20,0	12,9