



WOSm SERIES

WATER-OIL SEPARATORS

Ø8 mm
inlet connection

1,5 to 65 °C
operating temperature range

DESCRIPTION

WOSm water oil separators have been developed to separate lubricant oil from condensate generated in compressed air systems. Due to patented technology regular service can be done in 30 seconds without any cleaning.

Separation begins in "cyclonic depressurization chamber" and continues in "filter cartridge". When the "filter cartridge" is fully saturated you just simply unscrew complete cartridge and replace it with new one.

All the condensate stays in old cartridge which can also be sealed with plastic cover and disposed according to local directives and laws.

APPLICATIONS


- Compressed air systems
- Suitable for installation inside compressors
- Compressed air dryers
- Condensate separators
- Pressure vessels




ADVANTAGES

- ✓ Quick and clean separator cartridge replacement.
- ✓ Easy installation due to compact design and small dimensions.



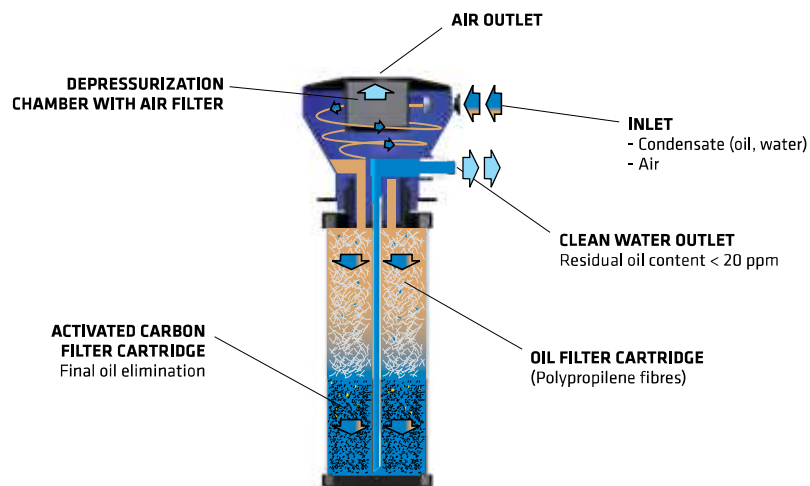

| TECHNICAL DATA | | | | | | | | | |
|-----------------------|---|-----------------------------------|-----------------------------------|-----------------|-----|-----|----|-----|----|
| Operating temperature | 1,5 - 45 °C (max 65 °C) ⁽¹⁾ ; 35 - 113 °F (max. 149 °F) ⁽¹⁾ | | | | | | | | |
| Operating media | Condensate (air, water, oil); Non aggressive; Not suitable for emulsion | | | | | | | | |
| Residual oil content | < 20ppm | | | | | | | | |
| Service interval | When first of following parameters appears: | | | | | | | | |
| | - 4000 operating hours of compressor ⁽²⁾ | | | | | | | | |
| | - 12 months regardless of compressor operating hours | | | | | | | | |
| | - when all white polypropylene media becomes yellow | | | | | | | | |
| | Cold climate zone 15 °C 60 %RH | Mild climate zone 25 °C 60 %RH | Hot climate zone 40 °C 100 %RH | Dimensions [mm] | | | | | |
| | | | | A | B | C | D | E | |
| W05m1 | Max oil adsorption [g] | 740 | 650 | 370 | 483 | 106 | 80 | 335 | 50 |
| | Max FAD [Nm ³ /min]/[scfm] | 1,23/43,05 | 1,08/37,8 | 0,62/21,9 | | | | | |
| | Max condensate flow [l/h] | 0,57 | 0,90 | 1,91 | | | | | |
| W05m2 | Max oil adsorption [g] | 1520 | 1340 | 770 | 816 | 106 | 80 | 670 | 50 |
| | Max FAD [Nm ³ /min]/[scfm] | 2,54/88,9 | 2,23/78,05 | 1,28/45,2 | | | | | |
| | Max condensate flow [l/h] | 1,19 | 1,87 | 3,96 | | | | | |

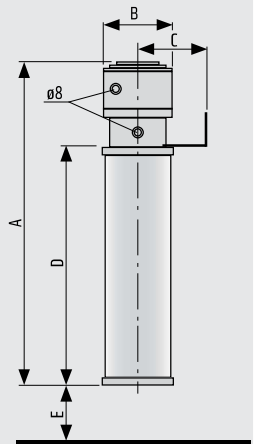

⁽¹⁾ Max. operating temperature is 65 °C, but when temperature is over 45 °C, performance may decrease.

⁽²⁾ At compressor oil carryover 2,5 mg/m³. Lower/higher oil carry over means proportionally longer/shorter lifetime (e.g. if oil carryover is 5 mg/m³ lifetime reduces to 2000 operating hours).